



PREMIER BUILDING MATERIAL

CONCRETE PAVER

PAVING SLAB | TACTILE PAVER | INTERLOCKING PAVER |
GRASS PAVER | PRECAST RC STRIP PAVER



www.pbm.my



Contents



PBM Concrete Paver

Concrete Paving Slab	4
Tactile Paver	5
Interlocking Paver	6
Grass Paver	7
Precast RC Strip Paver	7





Concrete Paving Slab

Blank Slab

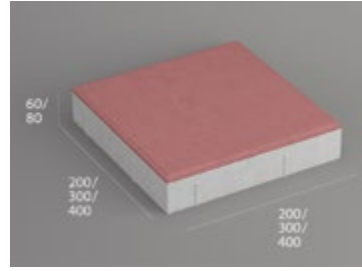



	200x200(mm) (25 pcs/m ²)		300x300(mm) (11.1 pcs/m ²)		400x400(mm) (6.25 pcs/m ²)
	60mm (±5.0 kg/pc)	80mm (±6.5 kg/pc)	60mm (±11.5 kg/pc)	80mm (±15.5 kg/pc)	60mm (±20.0 kg/pc)
Grey	P231	P1231	P331	P1331	P431
Black	P232	P1232	P332	P1332	P432
Red	P233	P1233	P333	P1333	P433

Fan Slab

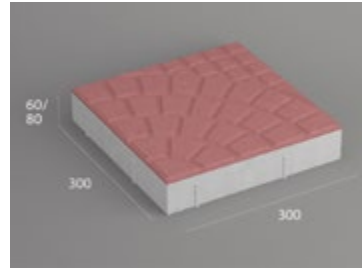

	200x200(mm) (25 pcs/m ²)		300x300(mm) (11.1 pcs/m ²)		400x400(mm) (6.25 pcs/m ²)
	60mm (±5.0 kg/pc)	80mm (±6.5 kg/pc)	60mm (±11.5 kg/pc)	80mm (±15.5 kg/pc)	60mm (±20.0 kg/pc)
Grey	-	-	P341	P1341	-
Black	-	-	P342	P1342	-
Red	-	-	P343	P1343	-



Uni Slab

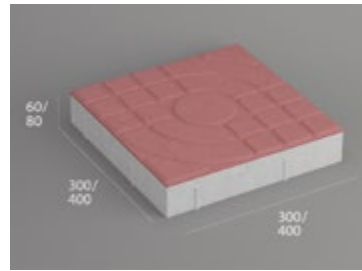

	200x200(mm) (25 pcs/m ²)		300x300(mm) (11.1 pcs/m ²)		400x400(mm) (6.25 pcs/m ²)
	60mm (±5.0 kg/pc)	80mm (±6.5 kg/pc)	60mm (±11.5 kg/pc)	80mm (±15.5 kg/pc)	60mm (±20.0 kg/pc)
Grey	-	-	P311	P1311	P411
Black	-	-	P312	P1312	P412
Red	-	-	P313	P1313	P413





Cube Slab

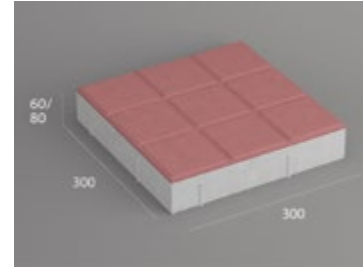

	200x200(mm) (25 pcs/m ²)		300x300(mm) (11.1 pcs/m ²)		400x400(mm) (6.25 pcs/m ²)
	60mm (±5.0 kg/pc)	80mm (±6.5 kg/pc)	60mm (±11.5 kg/pc)	80mm (±15.5 kg/pc)	60mm (±20.0 kg/pc)
Grey	-	-	P391	P1391	-
Black	-	-	P392	P1392	-
Red	-	-	P393	P1393	-

Star Slab


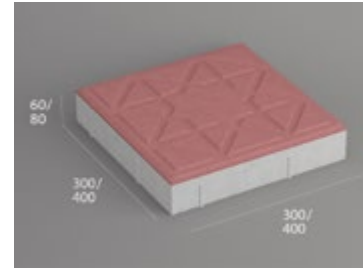


	200x200(mm) (25 pcs/m ²)		300x300(mm) (11.1 pcs/m ²)		400x400(mm) (6.25 pcs/m ²)
	60mm (±5.0 kg/pc)	80mm (±6.5 kg/pc)	60mm (±11.5 kg/pc)	80mm (±15.5 kg/pc)	60mm (±20.0 kg/pc)
Grey	-	-	P321	P1321	P421
Black	-	-	P322	P1322	P422
Red	-	-	P323	P1323	P423





Tactile Paver



Tactile Paver (Dot)

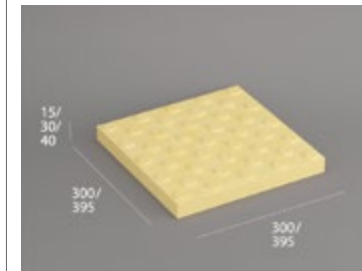

Tactile Paver (Plain)

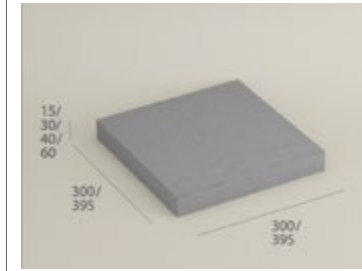

Tactile Paver (Line)

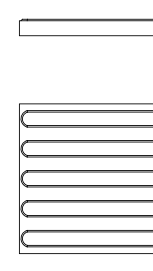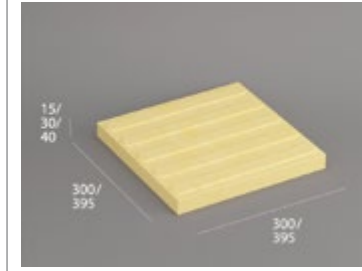

PBM Concrete Tactile Paver is a critical component in creating safe, accessible public spaces. Specifically designed to assist visually impaired individuals, these pavers feature raised profiles that provide tactile cues underfoot, helping to navigate complex environments with confidence.

Key Feature

Tactile Guidance

Available in distinct raised profiles, such as lines for directional guidance and dots for warning of potential hazards, these pavers provide clear and intuitive tactile feedback.

High-Contrast Colors

Designed in colors that offer strong contrast with surrounding surfaces, enhancing visibility for both visually impaired and sighted individuals.

Durable Construction

Constructed from high-quality concrete, these pavers are designed to endure the wear and tear of frequent pedestrian use and exposure to various weather conditions.



Dimension (mm)	Colour Code	Coverage	Weight /pc	Packaging /plt	Product Code		
					Dot	Line	Plain
300 x 300 x 15	Grey (1); Black (2); Yellow (5)	11 pcs/m ²	± 2.5 kg	468 pcs	ST-N(colour).15	ST-R(colour).15	ST-S(colour).15
300 x 300 x 30			± 5.0 kg	200 pcs	ST-N(colour)	ST-R(colour)	ST-S(colour)
300 x 300 x 40			± 7.4 kg	150 pcs	ST-N (colour).40	ST-R(colour).40	ST-S(colour).40
300 x 300 x 60			± 10.0 kg	120 pcs	-	-	ST-S(colour)
395 x 395 x 15		6.4 pcs/m ²	± 7.5 kg	300 pcs	ST-G(colour).15	ST-F(colour).15	ST-T(colour).15
395 x 395 x 30			± 10.0 kg	140 pcs	ST-G(colour).30	ST-F(colour).30	ST-T(colour).30
395 x 395 x 40			± 13.0 kg	104 pcs	ST-G(colour)	ST-F(colour)	ST-T(colour).40
395 x 395 x 60			± 20.0 kg	60 pcs	-	-	ST-T(colour)







Interlocking Paver

Holland Paver (49.5 pcs/m²)

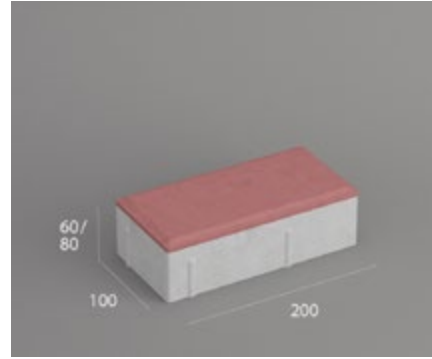

Height Weight/pc	60mm ± 2.45 kg	80mm ± 3.4 kg	100mm -
Grey	P21	P121	-
Black	P22	P122	-
Red	P23	P123	-


V Paver (39.5 pcs/m²)

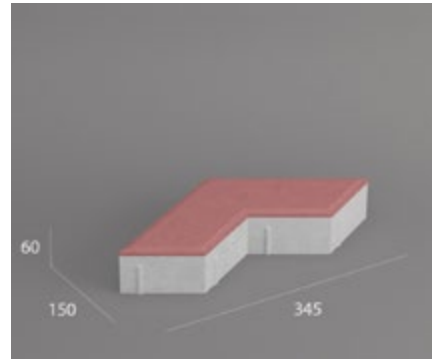

Height Weight/pc	60mm ± 3.1 kg	80mm -	100mm -
Grey	P861	-	-
Black	P862	-	-
Red	P863	-	-





Layang Paver (39.5 pcs/m²)

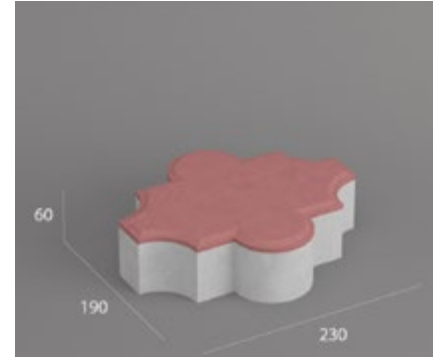

Height Weight/pc	60mm ± 3.1 kg	80mm ± 4.2 kg	100mm -
Grey	P961	P1961	-
Black	P962	P1962	-
Red	P963	P1963	-

Z Paver (39.5 pcs/m²)

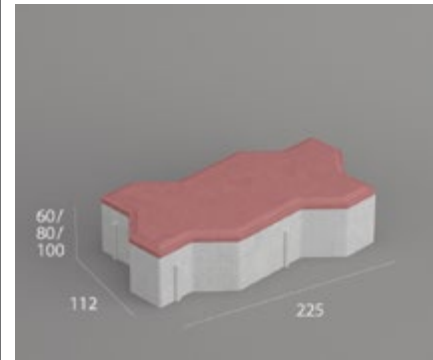

Height Weight/pc	60mm ± 3.1 kg	80mm ± 4.2 kg	100mm ± 5.4 kg
Grey	P01	P101	P111
Black	P02	P102	P112
Red	P03	P103	P113



Secondary Efflorescence


This surface phenomenon is commonly found in most concrete based or cementitious products. However, this efflorescence effect will disappear over time (weathering) whereby rain usually washes the efflorescence away in about six months to a year and in the worst scenario could take longer time.

General Information

The thickness and design of concrete segmental pavement depend on

- Estimated traffic volume
- Soil & subgrade investigation
- Surface design
- Basecourse thickness design
- Adjustments for weak subgrades or irregular areas



Tolerance of thickness shall be ± 3mm.

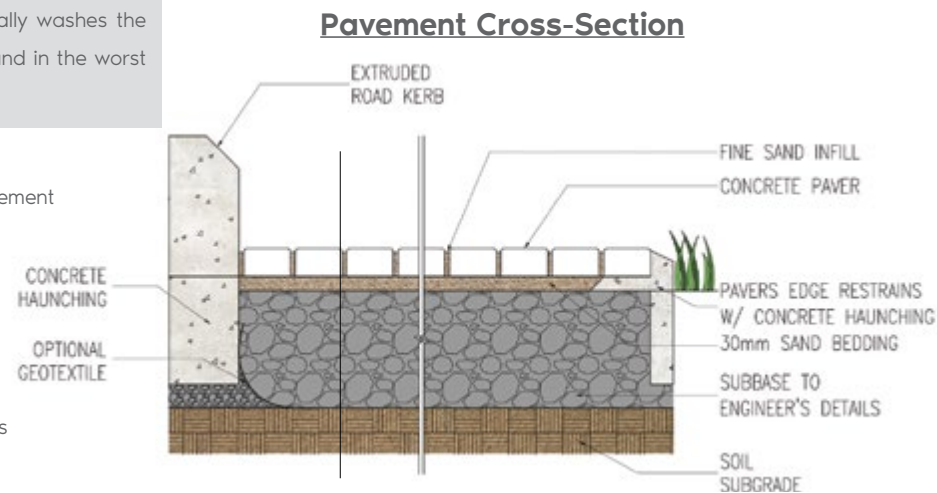

Grass Paver



CB 05

± 13.0 kg
9.36 pcs/m²

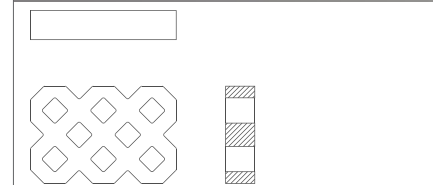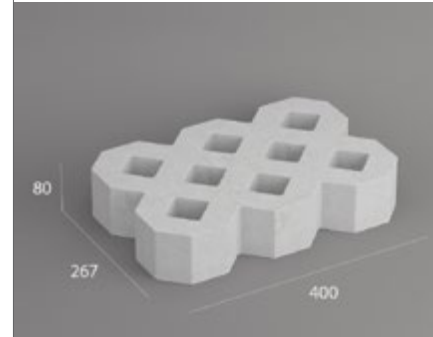



CB 06

± 4.5 kg
21.05 pcs/m²

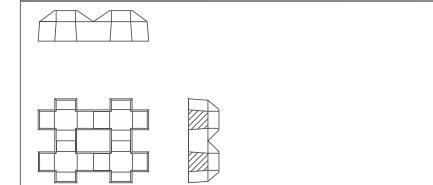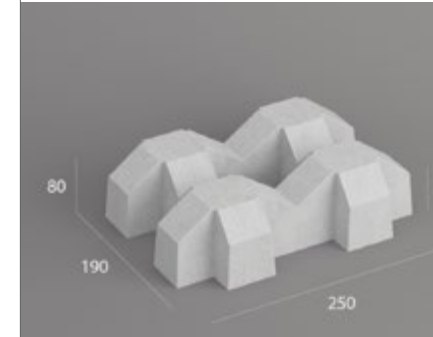

GT 01 (grey)

± 14.0 kg
11.1 pcs/m²

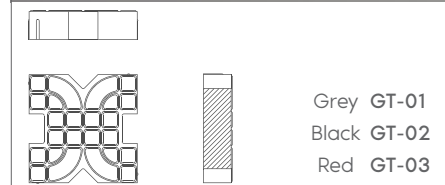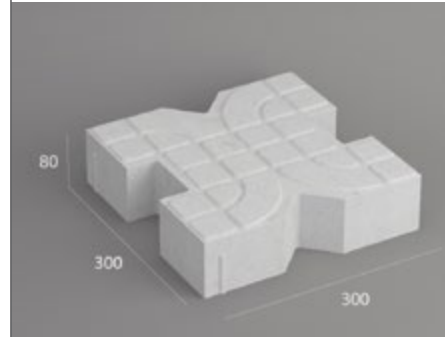


Grey GT-01
Black GT-02
Red GT-03



Precast RC Strip Paver



PPS01 (grey)

± 13.5 kg
8.88 pcs/m²

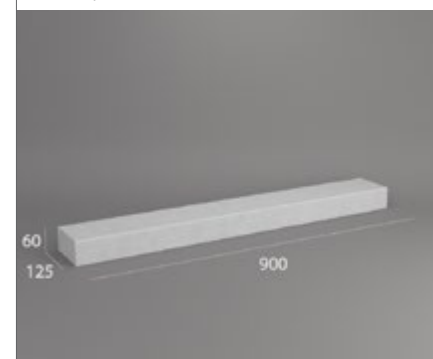

PPS02 (black)

± 13.5 kg
8.88 pcs/m²

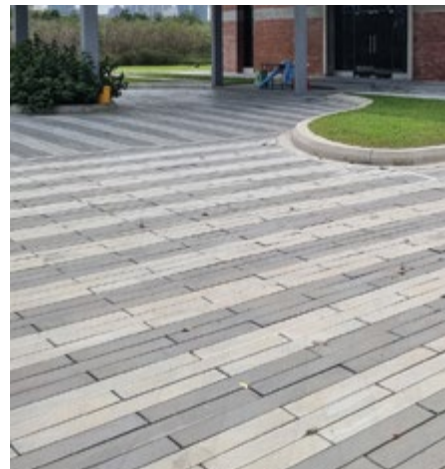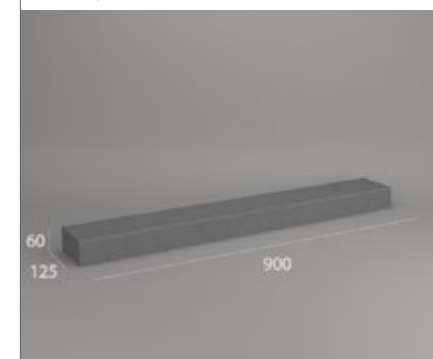



☎ 03-3264 8080 / 8686

📞 016-322 0772

✉ sales@pbm.my

🌐 www.pbm.my

📱 @pbm_ventblock



Premier Building Material Sdn. Bhd. (199901012879)

Lot 316, Pasir Tuntung, Api-Api, 45700, Bukit Rotan, Selangor, Malaysia.